


Datasheet

AHRS IMU Sensor | BS-IW901B-TTL

The Robust Acceleration, Angular velocity, Angle , Magnetic filed & Air Pressure Detector

The BS-IW901B-TTL is a IMU sensor device, detecting acceleration, angular velocity, angle, magnetic filed as well as air pressure. The robust housing and the small outline makes it perfectly suitable for industrial applications such as condition monitoring and predictive maintenance. Configuring the device enables the customer to address a broad variety of application by interpreting the sensor data by smart algorithms and Kalman filtering.

BUILT-IN SENSORS



Accelerometer



Gyroscope



Magnetometer



Barometer

If you have technical problems or cannot find the information that you need in the provided documents, please contact our support team. Our engineering team is committed to providing the required support necessary to ensure that you are successful with the operation of our AHRS sensors.

Application

- AGV Truck
- Platform Stability
- Auto Safety System
- 3D Virtual Reality
- Industrial Control
- Robot
- Car Navigation
- UAV
- Truck-mounted Satellite Antenna Equipment

Contents

Application	- 2 -
Contents	- 3 -
1 Overview.....	- 4 -
2 Features.....	- 5 -
3 Specification	- 6 -
3.1 Parameter	- 6 -
3.2 Size.....	- 12 -
3.3 Axial Direction	- 12 -
4 Pin Definition	- 13 -
5 Communication Protocol	- 14 -

1 Overview

BS-IW901B-TTL's scientific name is AHRS IMU sensor. A sensor measures 3-axis angle, angular velocity, acceleration, magnetic field and air pressure. Its strength lies in the algorithm which can calculate three-axis angle accurately.

BS-IW901B-TTL is employed where the highest measurement accuracy is required. BS-IW901B-TTL offers several advantages over competing sensor:

- Heated for best data availability
- High precision Roll Pitch Yaw (X Y Z axis) Acceleration + Angular Velocity + Angle + Magnetic Field + Air Pressure output

2 Features

- The default baud rate of this device is 9600 and could be changed.
- The interface of this product only leads to a serial port
- The module consists of a high precision gyroscope, accelerometer and geomagnetic field sensor. The product can solve the current real-time motion posture of the module quickly by using the high-performance microprocessor, advanced dynamic solutions and Kalman filter algorithm.
- The advanced digital filtering technology of this product can effectively reduce the measurement noise and improve the measurement accuracy.
- Maximum 200Hz data output rate. Output content can be arbitrarily selected, the output speed 0.2HZ~ 200HZ adjustable.

3 Specification

3.1 Parameter

Parameter	Specification
➤ Working Voltage	3.3V-5V
➤ Current	<25mA
➤ Size	15mm x 15mm X 2mm
➤ Data	Angle: X Y Z, 3-axis Acceleration: X Y Z, 3-axis Angular Velocity: X Y Z, 3-axis Magnetic Field : X Y Z, 3-axis Air Pressure : 1-Axis Time, Quaternion
➤ Output frequency	0.2Hz--200Hz
➤ Interface	Serial TTL level
➤ Baud rate	4800,9600(default),19200,38400,57600, 115200,230400

Measurement Range & Accuracy

Sensor	Measurement Range	Accuracy/ Remark
➤ Accelerometer	X, Y, Z, 3-axis ±16g	Accuracy: 0.01g Resolution: 16bit Stability: 0.005g
➤ Gyroscope	X, Y, Z, 3-axis -±2000°/s	Resolution: 16bit Stability: 0.05°/s
➤ Magnetometer	X, Y, Z, 3-axis ±4900μT	0.15μT/LSB typ. (16-bit)
➤ Angle/ Inclinometer	X, Y, Z, 3-axis X, Z-axis: ±180° Y ±90° (Y-axis 90° is singular point)	Accuracy:X, Y-axis: 0.05° Z-axis: 1°(after magnetic calibration)
➤ Barometer	1-axis	Accuracy : ±0.06hPa

Accelerometer Parameters

Parameter	Condition	Typical Value
Range		$\pm 16g$
Resolution		0.0005(g/LSB)
RMS noise	Bandwidth = 100Hz	0.75~1mg-rms
Static zero drift	Placed horizontally	$\pm 20 \sim 40mg$
Temperature drift	-40°C ~ +85°C	$\pm 0.15mg/^{\circ}C$
Bandwidth		5~256Hz

Gyro Parameters

Parameter	Condition	Typical Value
Range		$\pm 2000^{\circ}/s$
Resolution	$\pm 2000^{\circ}/s$	0.061($^{\circ}/s$)/(LSB)
RMS noise	Bandwidth = 100Hz	0.028~0.07($^{\circ}/s$)-rms
Static zero drift	Placed horizontally	$\pm 0.5 \sim 1^{\circ}/s$
Temperature drift	-40°C ~ +85°C	$\pm 0.005 \sim 0.015 (^{\circ}/s)/^{\circ}C$
Bandwidth		5~256Hz

Magnetometer parameters

Parameter	Condition	Typical Value
Range		$\pm 2\text{Gauss}$
Resolution	$\pm 2\text{Gauss}$	0.0667mGauss/LSB

Pitch and roll angle parameters

Parameter	Condition	Typical Value
Range		X: $\pm 180^\circ$; Y: $\pm 90^\circ$
Inclination accuracy		0.2°
Resolution	Placed horizontally	0.0055°
Temperature drift	-40°C ~ +85°C	$\pm 0.5 \sim 1^\circ$

Barometer Parameters

Parameter	Condition	Typical Value
Range		300~1100hPa
RMS noise	standard mode	0.5Pa-RMS
Relative accuracy		±0.06hPa

Heading Angle Parameter

Parameter	Condition	Typical Value
Range		Z:±180°
Heading accuracy	9-axis algorithm, magnetic field calibration, dynamic/static 6-axis algorithm, static	1° (without interference from magnetic field) 0.5° (Dynamic integral cumulative error exists)
Resolution	Placed horizontally	0.0055°

Module Parameters


Basic Parameters

Parameter	Condition	Minimum value	Default	Maximum value
Interface	UART	4800bps	115200bps	230400bps
Interface	Hardware I2C			400K
Interface	Analog I2C			100K
Output content		3-axis acceleration, 3-axis angular velocity, 3-axis magnetic field, 3-axis angle, magnetic field, quaternion		
Output rate		0.2Hz	10Hz	200Hz
Start Time				1000ms
Operating temperature		-40°C		85°C
Storage temperature		-40°C		100°C
Shock proof				20000g

Electrical parameters

Parameter	Condition	Min	Default	Max
Supply voltage		3.3V	5V	5.5V
Working current	Work (5V)		11.2mA	
	Sleep (5V)		12uA	


3.2 Size

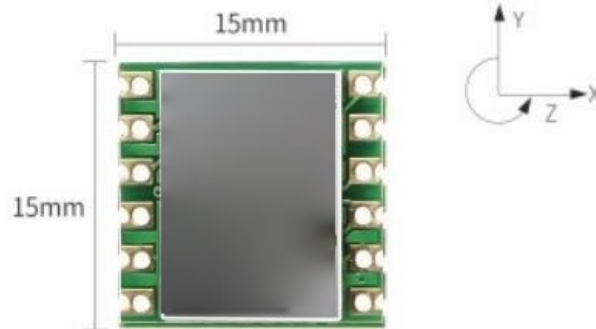


Parameter	Specification	Tolerance	Comment
Length	15	± 0.1	Unit: millimeter.
Width	15	± 0.1	
Height	2	± 0.1	
Weight	1	± 0.1	Unit: gram

3.3 Axial Direction

The coordinate system used for attitude angle settlement is the northeast sky coordinate system. Place the module in the positive direction, as shown in the figure below, direction right is the X-axis, the direction forward is the Y-axis, and direction upward is the Z-axis. Euler angle represents the rotation order of the coordinate system when the attitude is defined as Z-Y-X, that is, first turn around the Z-axis, then turn around the Y-axis, and then turn around the X-axis.

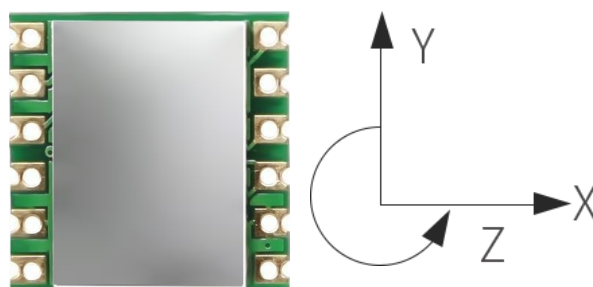

4 Pin Definition

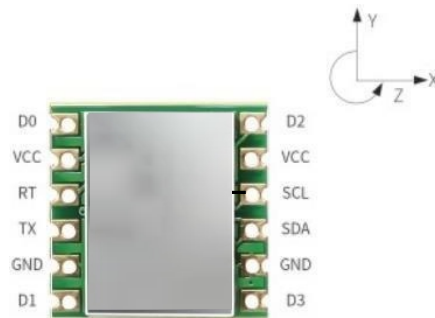

PIN	Function
➤ VCC	3.3-5V input supply
➤ RX	Serial data input, TTL interface
➤ TX	Serial data output, TTL interface
➤ GND	Ground
➤ D0	Analog input, digital input and output, PWM
➤ D1	Analog input, digital input and output, PWM, connect GPS
➤ D2	Analog input, digital input and output, PWM
➤ D3	Analog input, digital input and output, PWM
➤ SDA	I2C signal line
➤ SCL	I2C clock line

5 Communication Protocol

Level: TTL level

Baud rate: 4800, 9600 (default), 19200, 38400, 57600, 115200, 230400, stop bit and parity